

15/30Jwin – P2

GAS SENSOR / TRANSMITTER

Safe Area Detector Head / Junction Box Assembly

Specification Sheet C1809A
Doc No. 296 D9C

- Flexible output options
- CANbus, 4~20mA output
- Addressable or stand alone
- Hyperterminal communications RS232 line data and set up with 232 adapter
- Data logging
- Optional alarm relays
- Robust and weather-proof



The 30J enclosure has been designed to allow quick and easy access to its interior by adjustment of two allen screws, this factor is a major consideration when large system service and calibrations are being carried out.

The detector is robust and weather-proof with improved response times due to the four mounting spacers allowing increased air movement around the detector these spacers also improve the mounting of the unit particularly on circular pillars typically found in car parks. Standard 4~20mA signalling with CANbus address enables the sensors to be networked via the GDS Combi control system or customer preferred monitoring system.

Power Supply

15 to 30vDC 24v nominal

Outputs

3 wire – 4~20mA
4 wire – CANbus
Relays (optional)
Low alarm S.P.C.O
High alarm S.P.C.O
Fault alarm S.P.C.O / overrange
Rating 0.5A @30vDC
Inhibit option during servicing

Display

2 line alpha numeric back lit status display:
– gas type
– concentrating units
– alarm levels
– alarm status (low/high/over range)
– sensor ID

Sounder/Relay (optional)

Single relay – low/high alarm selectable
S.P.C.O 0.5A @30vDC
Sounder – not less than 85dB @ 30 cm

Logging

Intervals – variable time
Roll over/stop
Storage – 2,880 readings

Temperature

-15°C to 55°C

Humidity

Pellistor-catalytic
0 – 99% RH non condensing
Electrochemical
5 – 95% RH non condensing
Infrared
0 – 95% RH non condensing

DETECTOR HEAD

Type – P2 Safe area use

Ingress Protection

IP63 + Universal fitting IP64

Material

ABS - black

Sensor Inserts

7 series type

Electrochemical

Accessories - Optional

Collector Cone + Universal Fitting

Universal Fitting (test gas applicator/spray deflector)

Flow Block

Duct Mount Kit

Detector Head Weather Shield

JUNCTION BOX

Type – 15/30J safe area use only

15J – shallow box (S)

30J – deep box (D)

Ingress Protection

IP64

Material

ABS Flame retardant FR40

Lid Screws M4SS

Finish

Signal White RAL 9003

Weight

380gms

Entries

Rear 5-20mm knock outs

Sides, Top, Bottom – not specified

Mounting

Standoffs – M4 or No 8 screws


Drill at (C) when standoffs removed

Conduit box – drill at (A) 4.5mm

Surface mount box – drill at (B) 4.5mm

EU Design No.

01359723-0001

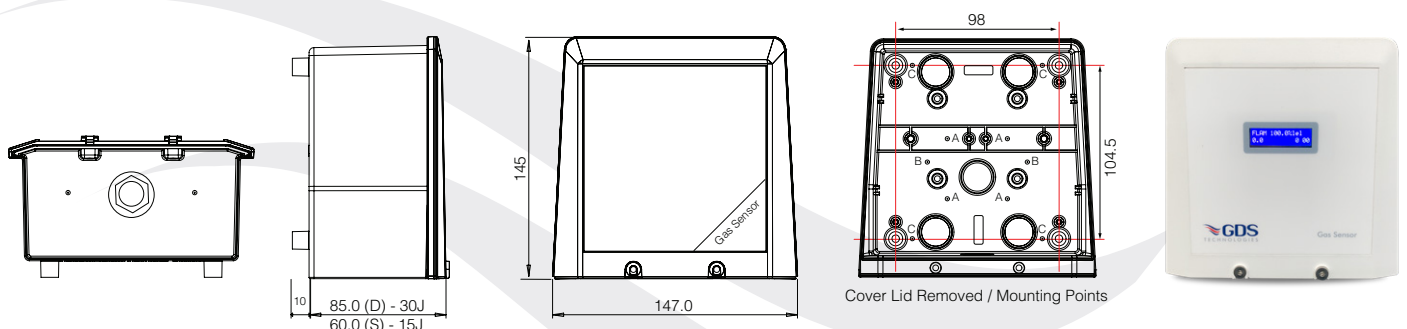

This document is not contractual and the equipment specification may be modified at any time without prior notice.

